




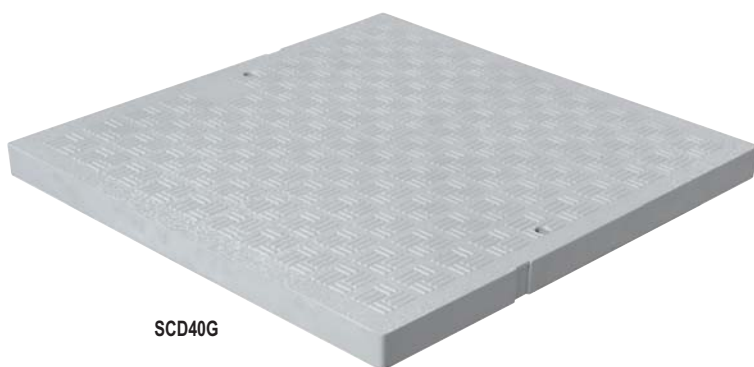

SCD40G



SCDB25G

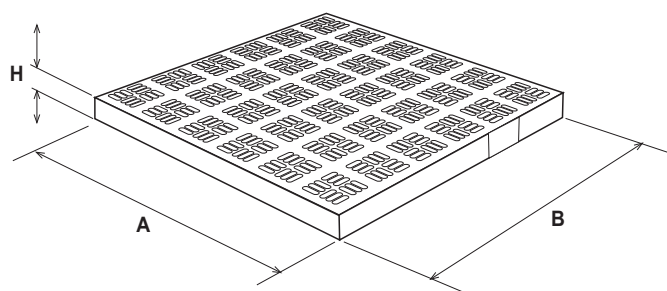

D I M E N S I O N E S

	A	B	H	Carga L.F.
SCD20	187	187	20	49 kN
SCD25/SCDB25	234	234	20	58 kN
SCD30	284	284	22	71 kN
SCDB30	284	284	22	71 kN
SCD40/SCDB40	383	383	25	B125
SCD45	435	435	25	90 kN
SCD55	534	534	35	75 kN

	Cod.	Dim. mm.	Color	Résistencia en KN	
Tapa reforzada 	SCD20G	200x200	Gris	49	10
	SCD25G	250x250	Gris	58	10
	SCD30G	300x300	Gris	71	5
	SCD40G*	400x400	Gris	B125	2
	SCD45G	450x450	Gris	90	2
	SCD55G	550x550	Gris	75	2
Tapa reforzada 	SCD20S	200x200	Arena	58	10
	SCD30S	300x300	Arena	71	5
	SCD40S*	400x400	Arena	B125	2
Tapa reforzada con bloqueo 	SCDB25G	250x250	Gris	58	10
	SCDB30G	300x300	Gris	71	5
	SCDB40G*	400x400	Gris	B125	2
Junta por bloqueo 	GUD30	300x300	Negro		10
	GUD40	400x400	Negro		4

*El valor de las cargas de rotura ha sido obtenido de conformidad al método de prueba de la norma EN 124 (1 Kn= 100 Kg)